



PR 22

Dynamic Microphone



- IsoBand (patent pending) to eliminate handling noise
- Best live sound vocal microphone
- Perfect Mid range articulation
- Wider Frequency range
- Absolute best snare drum microphone
- Heavy steel construction

General Description:


The Heil PR 22 represents completely new dynamic microphone technology designed for a wide range of professional applications such as live sound, commercial broadcast, and sophisticated recording. Its wide frequency range outperforms the tired, 30+ year old industry technology and can withstand huge amounts of SPL. The end result is a microphone that can answer the call to any application. For example, the gorgeous upper mid range makes the PR 22 the absolute best live vocal microphone, while its outstanding frequency response and superb dynamic range suit it perfectly for use with a snare drum.

Since 1982, Heil Sound has been the leading manufacturer of communications microphones and has a paramount understanding of phasing. When properly applied, this knowledge creates outstanding cardioid patterns with unbelievable rear rejection that removes unwanted sounds that try to enter from the off axis rear. The pattern control of the Heil PR 22 is outstanding. This exceptional performance is achieved by using the ideal combination of materials for the large low mass diaphragm and a special mixture of neodymium, iron, and boron that gives the PR 22 the strongest magnet structure available.

Frequency response	50 Hz - 18 kHz
Polar pattern	cardioid
Impedance	600 ohm balanced
Output level	-52.9 dB
End fire generating element	1 1/8" diameter dynamic
Polarity	pin 2+
Magnet structure	neodymium, iron & boron
Case structure	steel
Dimensions	
Length	7.25"
Diameter	1.65"
Stem diameter	7/8"
Weight	9 oz
Finish	matte black lacquer
Furnished Accessories	vinyl carrying bag, gold & black metal wind screen, microphone stand clip
Optional Accessories	SM-1 shock mount

In addition to the special magnet structure, the PR 22 achieves its exceptional performance by using a large 1 1/8" low mass voice coil assembly. Special attention has been paid to the phasing plug assembly with equally placed ports that sense audio from behind, entering them out of phase. Thus, the PR 20 produces a very linear cardioid pattern and reduces the proximity effect while achieving perfect articulation. This new Heil element is usable in extreme high sound pressure levels and is immune to overload conditions making it perfect for vocal and live sound applications. Welcome to your new workhorse microphone.


Dimension Drawing:

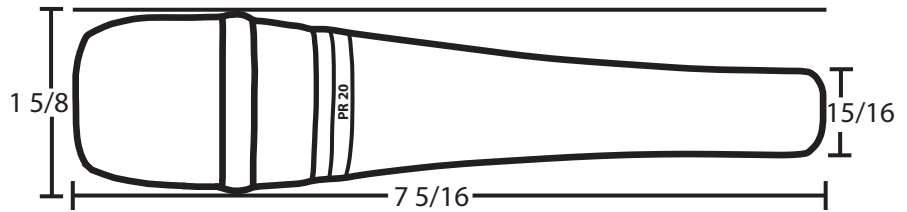


Engineers' Specifications:

A high performance microphone shall bring new large diameter technology to the industry. It shall have a personality in it's wide frequency response of 50 Hz. to 18 kHz. at the -3 dB points. The traditional Heil Sound 'bouquet' of mid range articulation will be featured which will bring gorgeous speech and instrument reproduction without the use of outboard equalization. A high degree of phasing plug assembly shall reduce the rear rejection typically at -18 dB or better. A large 1 1/8" diameter low mass voice coil assembly with a specially treated diaphragm that can create large dynamic levels. A special blend of neodymium, iron and boron will produce the strongest of magnet structure for this high performance microphone. Nominal impedance shall be 600 ohms. The proximity effect which is present in all cardioid microphones will be properly eliminated in the design of this new microphone. The microphone shall exhibit bright natural sounds, perfect for vocals as well as snare drum and cymbals. The case will be created in steel, finished in non-reflecting black matte color. The microphone shall have a maximum diameter of 1 5/8" with a length of 7 5/16". A cast zinc adjustable 5/8" - 27 stand patten lined in Teflon will be supplied. The new dynamic technology from Heil Sound shall be named the PR 20.


Polar Pattern:

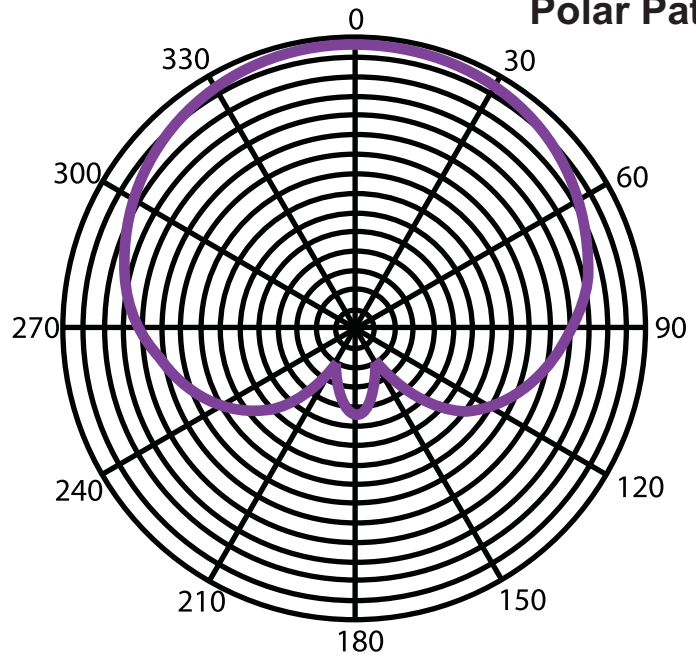

Frequency Response:

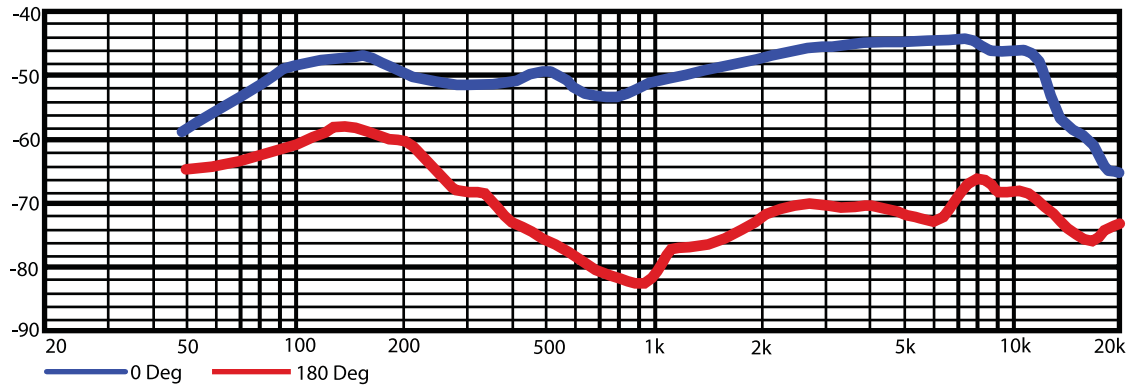

Wiring Diagram:

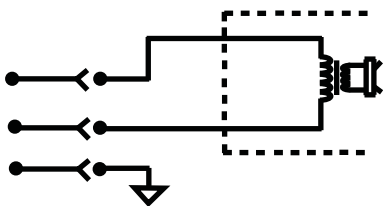

Heil Sound Ltd.
5800 North Illinois
Fairview Heights, IL 62208
618-257-3000 618-257-3001 fax
www.heilsound.com



For information contact
info@heilsound.com
For orders contact
orders@heilsound.com
For technical support contact
618-257-3000